

TURNIGY Manual for Brushless Motor Speed Controller

Thank you for purchasing our Electronic Speed Controller (ESC). High power systems for RC model can be very dangerous; we strongly suggest you read this manual carefully. We have no control over the correct use, installation, application, or maintenance of our products, no liability shall be assumed for any damages, losses or costs resulting from the use of the product. Any claims arising from the operating, failure or malfunctioning etc. will be denied. We assume no liability for personal injury, property damage or consequential loss resulting from our product or our workmanship. As far as is legally permitted, the obligation to compensation is limited to the invoice amount of the affected product.

Features:

- Lithium Battery Balance Discharge Monitoring and Protecting (BDMP) Design, monitors in real time the discharge voltage of each lithium (Li-Ion/Li-Poly) cell in a battery pack. Don't worry about the over discharge problem again, your lithium battery pack will have a much longer life. (Remark: This BDMP function is ONLY available for "SENTRY" series ESC)
- Extreme low resistance, high current endurance.
- Full protection features: Low-voltage cutoff protection / Over-heat protection / Throttle signal lost protection
- 3 startup modes: Normal / Soft / Super-Soft, can be used for both fixed-wing aircraft or helicopter models
- Throttle range can be configured, fully compatible with all kinds of available transmitters.
- Smooth and accurate speed control, excellent throttle linearity.
- Microprocessor uses separate voltage regulator IC (except PULSAR-6A and PULSAR-10A), with high anti-jamming capability.
- Supports up to: 21000 RPM (2 poles), 70000 RPM (6 poles), 35000 RPM (12 poles) motors.
- The program card is a very small device which can be purchased additionally for easy programming the ESC in the field.
- With a program card, you can activate the music playing function of ESC, and there are 15 songs can be selected.

Specifications:

PULSH Series											
Class	Model	Cont. Current	Burst Current (>10s)	BEC Mode	BEC Output	Battery Cell Li-Ion / Li-Poly	Cell NiMH / NiCd	User Programmable	Balance Discharge Protection	Weight	Size L*W*H
6A	PULSH-6	6A	8A	Linear	5V/0.8	2	5-6	Available	N/A	6g	24*12*6
10A	PULSH-10	10A	12A	Linear	5V/2A	2-4	5-12	Available	N/A	9g	27*17*6
12A	PULSH-12	12A	15A	Linear	5V/1A	2-4	5-12	Available	N/A	12g	32*24*8
12A	PULSH-12E	12A	15A	Linear	5V/2A	2-4	5-12	Available	N/A	13g	32*24*10
18A	PULSH-18	18A	22A	Linear	5V/2A	2-4	5-12	Available	N/A	19g	45*24*11
25A	PULSH-25	25A	35A	Linear	5V/2A	2-4	5-12	Available	N/A	22g	45*24*11
30A	PULSH-30	30A	35A	N/A	N/A	2-4	5-12	Available	N/A	21g	45*24*11
40A	PULSH-40	40A	40A	Linear	5V/2A	2-4	5-12	Available	N/A	23g	45*24*11
40A	PULSH-40-OPTO	40A	55A	N/A	N/A	2-6	5-18	Available	N/A	32g	55*28*12
60A	PULSH-60	60A	80A	Switch	5V/3A	2-6	5-18	Available	N/A	60g	70*31*13
60A	PULSH-60-OPTO	60A	80A	N/A	N/A	2-6	5-18	Available	N/A	56g	70*31*13
80A	PULSH-80	80A	100A	Switch	5V/3A	2-6	5-18	Available	N/A	62g	70*31*14
80A	PULSH-80-OPTO	80A	100A	N/A	N/A	2-6	5-18	Available	N/A	58g	70*31*13

SENTRY Series

Class	Model	Cont. Current	Burst Current (>10s)	BEC Mode	BEC Output	Battery Cell Li-Ion / Li-Poly	Cell NiMH / NiCd	User Programmable	Balance Discharge Protection	Weight	Size L*W*H
18A	SENTRY-18	18A	22A	Linear	5V/2A	2-4	5-12	Available	Available	24g	45*26*11
25A	SENTRY-25	25A	35A	Linear	5V/2A	2-4	5-12	Available	Available	27g	45*26*12
30A	SENTRY-30	30A	40A	Linear	5V/2A	2-4	5-12	Available	Available	29g	45*26*12
40A	SENTRY-40	40A	55A	Switch	5V/3A	2-6	5-18	Available	Available	40g	55*28*15
60A	SENTRY-60	60A	80A	Switch	5V/3A	2-6	5-18	Available	Available	62g	70*31*14
80A	SENTRY-80	80A	100A	Switch	5V/3A	2-6	5-18	Available	Available	67g	70*31*14

BASIC Series

Class	Model	Cont. Current	Burst Current (>10s)	BEC Mode	BEC Output	Battery Cell Li-Ion / Li-Poly	Cell NiMH / NiCd	User Programmable	Balance Discharge Protection	Weight	Size L*W*H
18A	BASIC-18	18A	22A	Linear	5V/2A	2-4	5-12	Available	Available	24g	45*26*11
25A	BASIC-25	25A	35A	Linear	5V/2A	2-4	5-12	Available	Available	27g	45*26*12

BEC Output Capability


Linear Mode BEC(SV2A)			Switch Mode BEC(SV3A)			
Standard micro servos(Max.)	2S Li-Poly	3S Li-Poly	4S Li-Poly	5S Li-Poly	2S - 4S Li-Poly	5S Li-Poly
	5	4	3	2	5	4

IMPORTANT! The ESC named "xxx-xxx-OPTO" hasn't a built-in BEC, so an UBEC (Ultimate-BEC) or an individual battery pack should be used to power the receiver. And an individual battery pack is needed to power the program card when setting the

TURNIGY Manual for Brushless Motor Speed Controller

programmable value of ESC, please read the user manual of program card for reference.

Wiring Diagram:

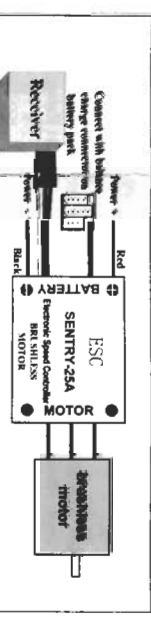

Lithium Battery Balance Discharge Monitoring and Protecting Adapter For "SENTRY" Series ESC. We provide 2 kinds of Lithium Battery Balance Discharge Monitoring and Protecting Adapters for user to choose.

Adapter #1



It's suitable for 2S Li-Poly battery

Adapter #2



Suitable for Thunder Power 2-3S Li-Poly battery & E-RC 2-4S LiPo battery

VERY IMPORTANT! You MUST connect the adapter with the balance charge connector on battery pack BEFORE connecting the main power to ESC. And if you use battery-charging connectors on main power wires (input wires), please connect the black wire (negative polarity) BEHIND and wire (positive polarity). So the right sequence is: Balance discharge adapter - BLACK wire of main power - RED wire of main power

Feature Explanation:

1. Brake Settings: Brake Enabled / Brake Disabled, default is Brake Disabled
2. Battery Type: Li-x(Li-ion or Li-Poly) / Ni-x(NiMH or NiCd), default is Li-x.
3. Low Voltage Protection Mode(Cutoff Mode): Reduce / Cutoff Output Power, default is Reduce the output power gradually.
4. Low Voltage Protection Threshold(Cutoff Threshold): Low / Medium / High, default is Medium.
 - When NOT using balance discharge monitoring and protecting function (i.e. Do NOT plug the balance charge connector into the balance discharge protecting socket on ESC, in this case, the ESC only monitors the voltage of whole battery pack)
 - 1) For Li-x battery, number of battery cells are calculated automatically, low / medium / high cutoff voltage for each cell are: 2.6V/2.85V/3.1V. For example: 3 cells Li-Poly when medium cutoff voltage is set, the cutoff voltage is: 2.85*3=8.55V.
 - 2) For Ni-x battery, low / medium / high cutoff voltages are 0%/45%/60% of the startup voltage (i.e. the initial voltage of battery pack), and 0% means low voltage cutoff function is disabled. For example: 10 cells NiMH battery, fully charged voltage is 1.44*10=14.4V, when "medium" cutoff voltage is set, the cutoff voltage is: 14.4*45%=6.5V.
 - When using balance discharge monitoring and protecting function (i.e. Plug the balance charge connector on battery pack into the balance discharge protecting socket on ESC, in this case, the ESC monitors not only the voltage of whole battery pack but also the voltage of each cell). For Li-x battery, low / medium / high cut off voltage for each cell are: 2.6V/2.85V/3.1V. When the voltage of any cell in battery pack is lower than the cutoff threshold, the protecting program is activated.
5. Startup Mode: Normal / Soft / Super-soft, default is Normal startup.
 - Normal is good for fixed-wing aircraft. Soft and Super-soft are good for helicopters. The initial speed of soft / super-soft mode is very slow, 1 second (soft startup) / 2 seconds (super-soft startup) from startup to full speed. But if throttle is closed (throttle stick is moved to bottom) and opened again (throttle stick is moved upwards) within 3 seconds after the first startup, the restart will be temporarily changed to normal mode to get rid of the chances of crash caused by slow throttle response in aerobically.
 - Timing: Low / Medium / High, default is Low.
 - In normal cases, low timing can be used for most motors. But for high efficiency, we recommend the Low timing for 2 poles motor and Medium timing for 6 poles and above. For higher speed, High timing can be chosen.
6. **Important!** After you changing the timing setting, please test your RC model on ground firstly!

Special Hint

Some high KV out-runner motors have very special configuration, the space between each alloy is very large, and lots of ESCs can't drive these motors. After updating the program, our ESCs have very good compatibility with them. But some RC fans still have several questions about the programmable value for the special motors. So we just give some suggestions as follows:

Motor	Programmable Value Suggestion	Timing	Startup Mode
General in-runner motor	Low	Low	Usually aircraft uses "normal" startup mode
General out-runner motor	Low or Medium	Low or Medium	Usually aircraft uses "super-soft" startup mode
Align 420LF (Made in TAIWAN, out-runner)	High (MUST)	High (MUST)	
450TH (Made in TAIWAN, out-runner)	Low	Low	Soft (MUST)

Begin To Use Your New ESC

- Please start up the ESC in the following sequence:
1. Move the throttle stick to bottom position and then switch on the transmitter.
 2. Connect battery pack to ESC, the ESC begins the self-test process, a special tone " J 123" is emitted, which means the voltage of battery pack is in normal range, and then N "beep" tones will be emitted, means the quantity of lithium battery cells. Finally a long beep-----, tone will be emitted, which means self-test is OK, the aircraft/helicopter is ready to go flying.
- If nothing is happened, please check the battery pack and all the connections.

- If a special tone "J 567i2" is emitted after 2 beep tones ("beep-beep-"), means the ESC has entered the program mode, i.e. the throttle channel of your transmitter is reversed, please set it correctly.
 - If a very rapid "beep-beep- beep-beep-" tone is emitted, means the input voltage is too low or too high, please check your battery's voltage.
- VERY IMPORTANT** Because different transmitter has different throttle range, we strongly suggest you using the "Throttle Range Setting Function" to calibrate throttle range. Please read the instruction on page 4-----"Throttle Range Setting".

Alert Tone

1. Input voltage abnormal alert tone: The ESC begins to check the voltage of battery pack when power on, if the voltage is not in acceptable range, such an alert tone will be emitted: "beep-beep- beep-beep- (every "beep-beep-" has a time interval about 1 second.)"
2. Throttle signal abnormal alert tone: When the ESC can't detect the normal throttle signal, such an alert tone will be emitted: "beep-beep- (Every "beep-" has a time interval about 2 seconds)"
3. Throttle stick not at bottom (lowest) position alert tone: When the throttle stick is not in bottom (lowest) position, a very rapid alert tone will be emitted: "beep- beep- beep- (Every "beep-" has a time interval about 0.25 second.)"

Protection Function

1. Start up protection: If the motor failed to start up in 2 seconds while the throttle stick is being moved upwards, the ESC will cut off the output power. In this case, the throttle stick **MUST** be moved to bottom again to restart the motor. (Such a situation happens in the following cases: The connection between ESC and motor is not reliable, propeller is blocked, gearbox is damaged, etc.)
2. Over-heat protection: When the temperature of ESC is higher than a factory-present value, the ESC will reduce the output power.
3. Throttle signal loss protection: The ESC will reduce output power if throttle signal lost for 1 second, further lost for 2 seconds will cause its output to be cut off.

Program examples

Setting startup mode to "super-soft", i.e. value #3 in program item #5

1. **Enter Program Mode**
Switch on transmitter, move throttle stick to top, connect battery pack to ESC, wait for 2 seconds, "beep-beep" tone should be emitted. Then wait another 5 seconds, special tone like "567i2" should be emitted, means program mode is entered.
2. **Select Programmable Items**
Now you'll hear 8 tones in loop. When a long "beep-----" tone is emitted, move throttle stick to bottom to enter the "Startup Mode"
3. **Set Item Value (Programmable Value)**
"Beep-", wait for 3 seconds. "Beep-beep-", wait for another 3 seconds; then you'll hear "beep-beep-beep-", move throttle stick to top, then a special tone "i5i5" is emitted, now you have set the "Startup Mode" item to the value of "Super-soft Startup"
4. **Exit Program Mode**
After the special tone "i5i5", move throttle stick to bottom within 2 seconds.

Trouble Shooting

Trouble	Possible Reason	Action
After power on, motor can't work, no sound is emitted	The connection between battery pack and ESC is not OK	Check the power connection. Replace the connector.
After power on, motor can't work, such an alert tone is emitted: "beep-beep- beep-beep- (Every "beep-beep-" has a time interval about 1 second)"	Input voltage is abnormal, too high or too low	Check the voltage of battery pack
After power on, motor can't work, such an alert tone is emitted: "beep- beep- beep- (Every "beep-" has a time interval about 2 seconds)"	Throttle signal is abnormal	Check the receiver and transmitter Check the cable of throttle channel
After power on, motor can't work, such a alert tone is emitted: "beep- beep- beep- (Every "beep-" has a time interval about 0.25 second)"	Throttle stick is not in bottom(lowest) position	Move the throttle stick to bottom
The motor runs in opposite direction	The direction of throttle channel is reversed, so the ESC has entered the program mode	Set the direction of throttle channel correctly
The motor stop running while in working state	The connection between ESC and the program mode Throttle signal is lost	Swap any two wire connections between ESC and motor Check the receiver and transmitter Check the cable of throttle channel
	ESC has entered Low Voltage Protection mode Some Connections are not reliable	Land RC model as soon as possible, and then replace the battery pack Check all the connections: battery pack connection, throttle signal cable, motor connections, etc.

Normal startup procedures

Switch on transmitter, move throttle stick to bottom	Connect battery pack to ESC, special tone like "J 123" means power supply is OK	Several "beep-" tones should be emitted, presenting the quantity of lithium battery cells	When self-test is finished, a long "beep-----" tone should be emitted	Ready to go flying now
--	---	---	---	------------------------

Throttle range settings: (Throttle range should be reset when a new transmitter is being used)

Switch on transmitter, and wait for about 2 seconds	Connect battery pack to ESC, and wait for about 2 seconds	"Beep-beep-" tone should be emitted, means throttle range highest point has been correctly confirmed	Move throttle stick to the bottom, several "beep-" tones should be emitted, presenting the quantity of battery cells	A long "Beep-" tone should be emitted, means throttle range lowest point has been correctly confirmed
---	---	--	--	---

Program ESC with transmitter (4 Steps)

1. Enter program mode
2. Select programmable items
3. Set item value (Programmable value)
4. Exit program mode

1. Enter program mode

- 1) Switch on transmitter, move throttle stick to top position, connect the battery pack to ESC
- 2) Wait for 2 seconds, the motor should emit special tone like "beep-beep-"
- 3) Wait for another 5 seconds, special tone like "567i2" should be emitted, which means program mode is entered

2. Select programmable items:

After entering program mode, you can hear 8 tones in a loop in the following sequence. If you move the throttle stick to bottom within 3 seconds after one kind of tones, then this item will be selected.

1. "beep"	brake	(1 short tone)
2. "beep-beep"	battery type	(2 short tone)
3. "beep-beep-beep"	cutoff mode	(3 short tone)
4. "beep-beep-beep-beep"	cutoff threshold	(4 short tone)
5. "beep-----"	startup mode	(1 long tone)
6. "beep-----beep-"	timing	(1 long 1 short)
7. "beep-----beep-beep-"	set all to default	(1 long 2 short)
8. "beep-----beep-----"	exit	(2 long tone)

Remark: 1 long "beep-----" = 5 short "beep-"

3. Set item value (Programmable value):

You will hear several tones in loop. Set the value matching to a tone by moving throttle stick to top when you hear the tone, then a special tone "i5i5" emits, means the value is set and saved. (Keeping the throttle stick at top position, you will go back to step 2 and select other items. Moving the stick to bottom within 2 seconds, you will exit the program mode directly)

Tones	"beep-" 1 short tone	"beep-beep-" 2 short tones	"beep-beep-beep" 3 short tones
Items	Off	On	
Brake	Off	On	
Battery type	LiIon / LiPoly	NiMH / NiCd	
Cutoff mode	Reduce power	Shut down	
Cutoff threshold	Low	Medium	High
Startup mode	Normal	Soft	Super soft
Timing	Low	Medium	High

4. Exit program mode

There are 2 ways to exit program mode:

1. In step 3, after special tone "i5i5", move throttle stick to bottom within 2 seconds.
2. In step 2, after tone "beep-----beep-----" (ie. The item #8), move throttle stick to bottom within 3 seconds.